

Technical data

Voltage	U	230/400	V
Phase		3	~
Frequency	f	60	Hz
Speed	n	815	RPM
Power consumption	P _e	700	W
Nominal current	I _{nom}	3.6/2.1	A
Maximum current	I _{max}	3.8/2.2	A
Cos φ		0.49	
Capacitor		-	μF/V
Ambient temperature	T _{amb min/max}	-25...40	°C
Insulation Class		CL.F	
IP Class		IP55	
Weight		61.5	kg

Fan details



Impeller blades	3
Impeller type	8
Impeller system	G
Impeller material	PG

Control options

Triac controller	No
Transformer	Yes
Frequency drive	No

Characteristics


0 Pa 21300 m³/h
50 Pa 15600 m³/h

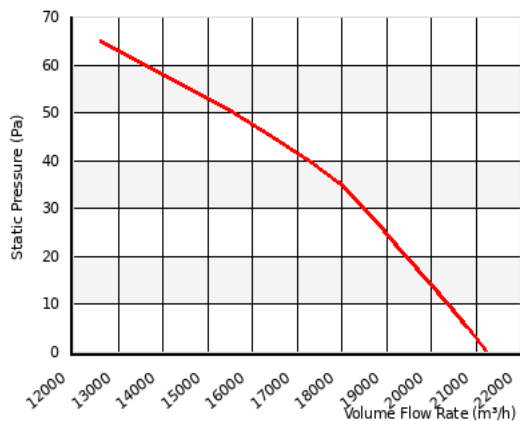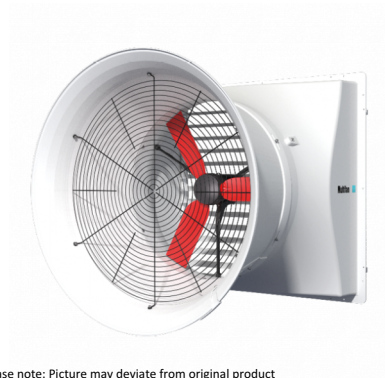

Please note: Picture may deviate from original product



Approval(s)

Wiring diagram
C11 - 3 Phase - Delta connection - CCW

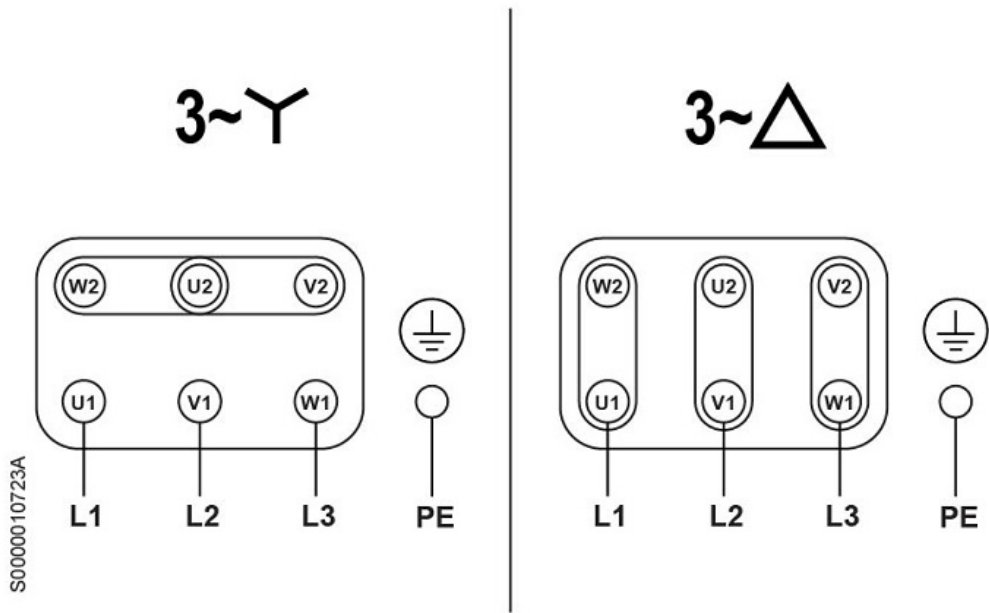

Article number: C8D92K0M10241

FC fans - High efficient

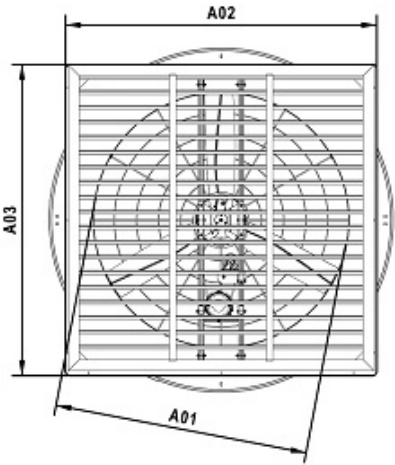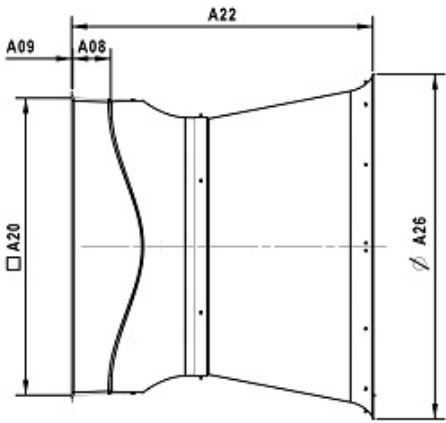Dimensions			
		A01:	913 mm
		A02:	1246 mm
		A03:	1246 mm
		A08:	182 mm
		A09:	8 mm
		A20:	1153 mm
		A22:	1236 mm
		A26:	1286 mm