

Technical data

Voltage	U	200-230	V
Phase		1	~
Frequency	f	50/60	Hz
Speed	n	885	RPM
Power consumption	P _e	910	W
Nominal current	I _{nom}	6.5	A
Maximum current	I _{max}	7.0	A
Cos φ		0.61	
Capacitor		-	μF/V
Ambient temperature	T _{amb min/max}	-13...104	°F
Insulation Class		CL.F	
IP Class		IP55	
Sound pressure level (6.6 ft)	L _p (meas.)	73	dB(A)
Sound pressure level (23 ft)	L _p (calc.)	62	dB(A)
Weight		51.3	Lbs.
Packing dimensions		29.7x29.7x16.1	inch

Fan details


Impeller blades	4
Impeller type	8
Impeller system	G
Impeller material	PG

Control options


Triac controller	No
Transformer	No
Frequency drive	Yes

Characteristics

0.00 in. wg 11300 CFM
0.20 in. wg 9360 CFM

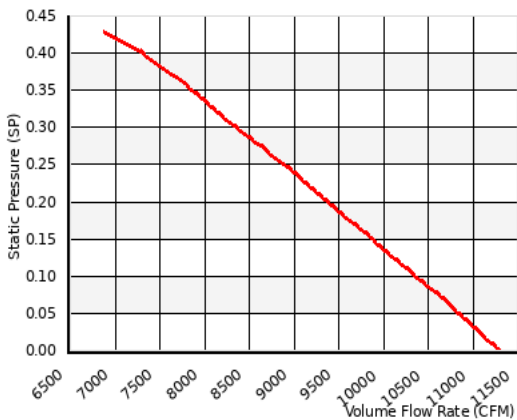


Speed control diagram

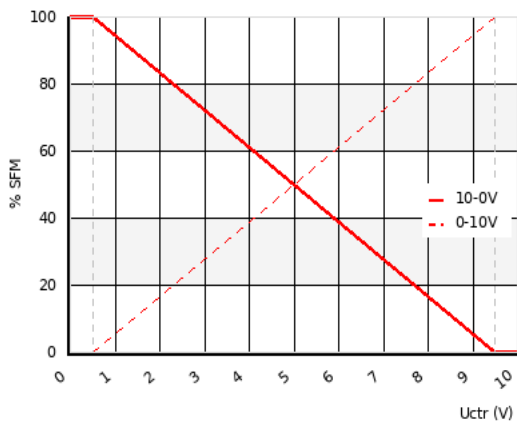

Please note: Picture may deviate from original product

Wiring diagram

CC03 - 3 Phase - Delta connected + MFD33S --

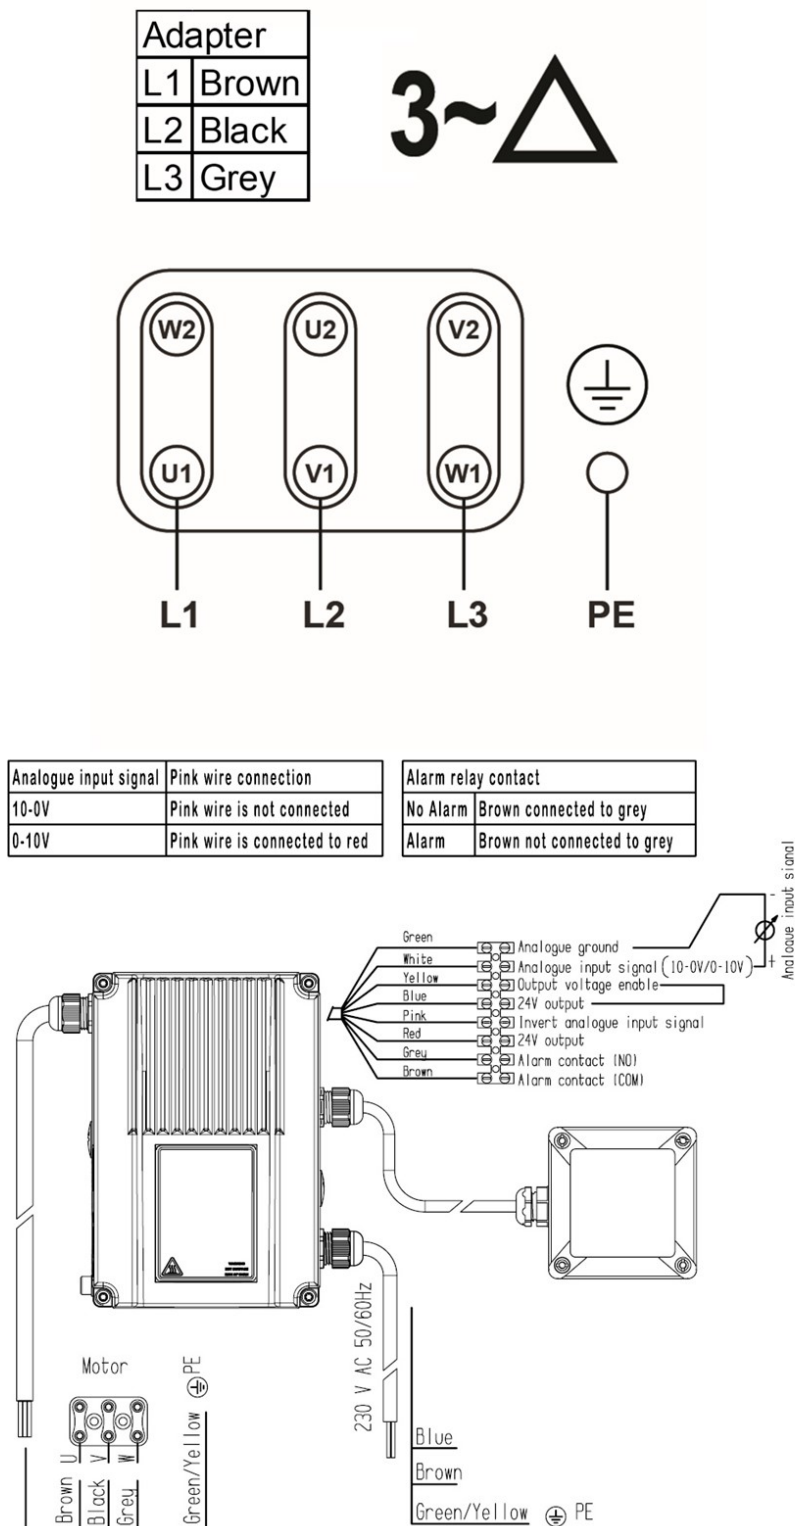

Dimensions

