



Technical data

Voltage	U	230/400	V
Phase		3	~
Frequency	f	50	Hz
Speed	n	955	RPM
Power consumption	P _e	1700	W
Nominal current	I _{nom}	6.2/3.6	A
Maximum current	I _{max}	6.9/4.0	A
Cos φ		0.68	
Capacitor		-	μF/V
Ambient temperature	T _{amb min/max}	-25...40	°C
Insulation Class		CL.F	
IP Class		IP55	
Sound pressure level (2 m)	L _p (meas.)	79	db(A)
Sound pressure level (7 m)	L _p (calc.)	68	db(A)
Weight		39.8	kg
Packing dimensions		1200x1050x500	mm


Fan details

Impeller blades	8
Impeller type	8
Impeller system	G
Impeller material	PG

Control options

Triac controller	No
Transformer	No
Frequency drive	Yes

Characteristics

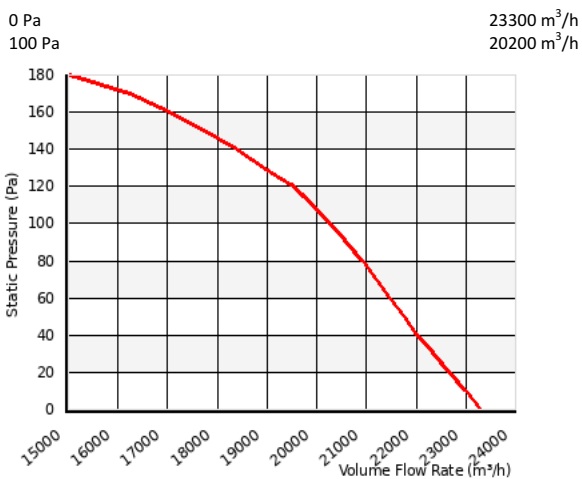

Please note: Picture may deviate from original product

Approval(s)

Motor approval
CE **UL**



Wiring diagram
C11 - 3 Phase - Y connection - CCW



Dimensions

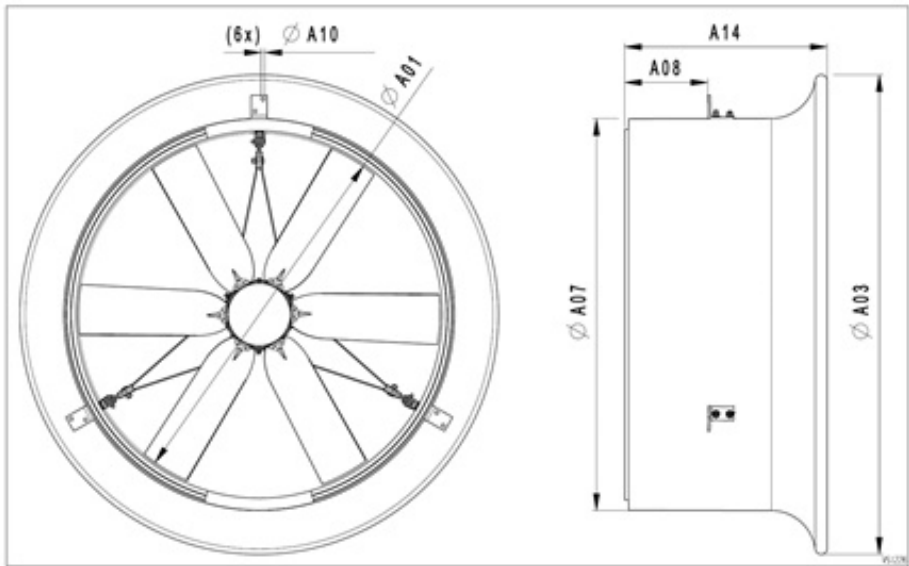


Fig. 1

A01:	790 mm
A03:	1000 mm
A07:	818 mm
A08:	228 mm
A10:	9 mm
A14:	412 mm