



Technical data

Voltage	U	230/400	V
Phase		3	~
Frequency	f	50	Hz
Speed	n	1405	RPM
Power consumption	P _e	210	W
Nominal current	I _{nom}	0.8/0.4	A
Maximum current	I _{max}	0.9/0.5	A
Cos φ		0.69	
Capacitor		-	μF/V
Ambient temperature	T _{amb min/max}	-25...40	°C
Insulation Class		CL.F	
IP Class		IP55	
Sound pressure level (2 m)	L _p (meas.)	64	dB(A)
Sound pressure level (7 m)	L _p (calc.)	53	dB(A)
Weight		10.5	kg
Packing dimensions		560x560x315	mm


Fan details

Impeller blades	6
Impeller type	3
Impeller system	C
Impeller material	PP

Control options

Triac controller	No
Transformer	Yes
Frequency drive	Yes

Characteristics

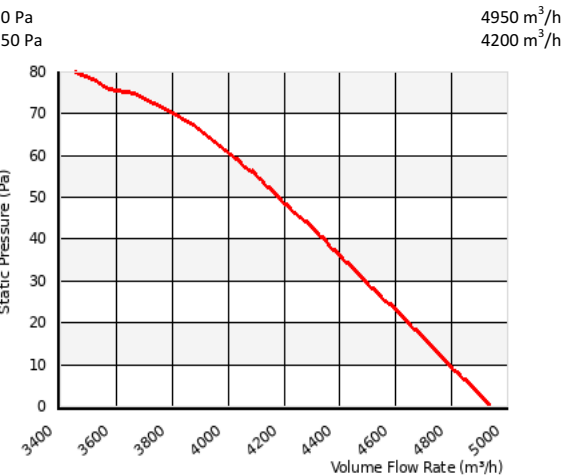

Please note: Picture may deviate from original product


Approval(s)



Wiring diagram
C11 - 3 Phase - Y connection - CCW



Dimensions

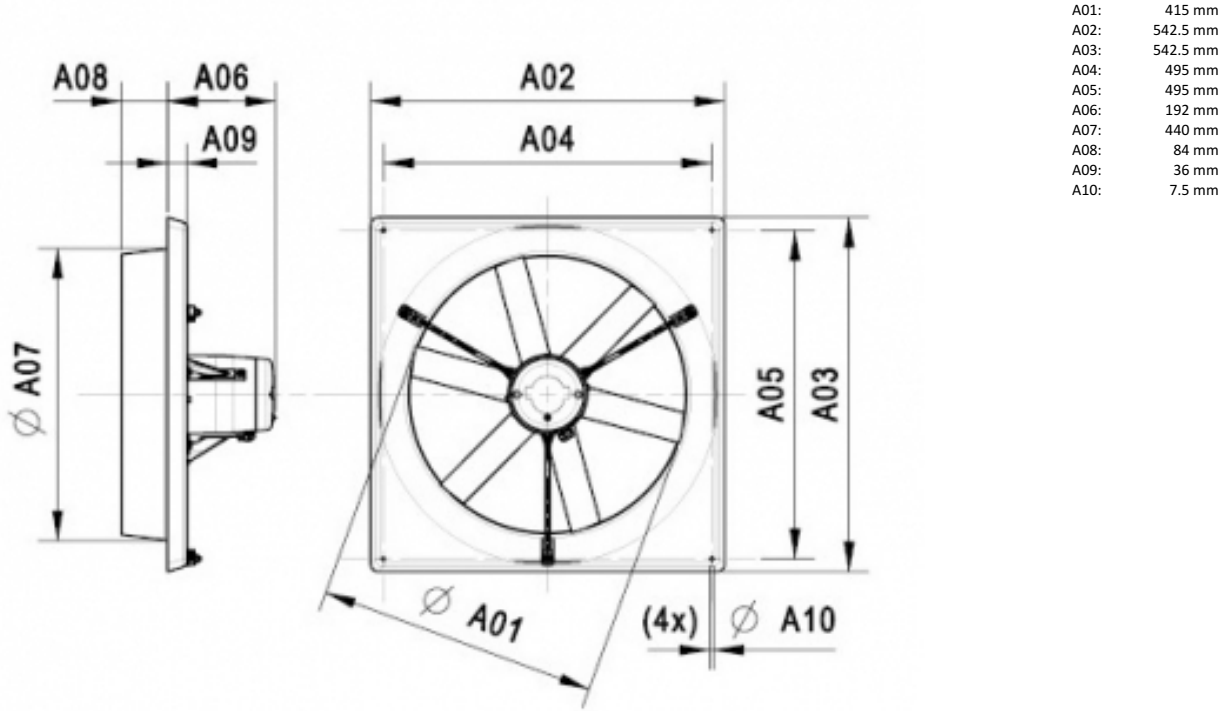

Data according to commission Regulation (EU) 327/2011

Axial fan efficiency	ηf	33.2%
Measurement category		A
Efficiency category		Static
Efficiency grade	N	44
VSD		Not included
Year of manufacturing		
Manufacturer		VOSTERMANS Parlevinkerweg 54 5928 NV Venlo The Netherlands 12021767
Commercial reg. no.		V4D40AAM10100
Model number		
Motor input power	Pe	0.231 kW
Volume flow	Qv	3454 m³/h
Pressure difference	psf	80 Pa
Rotational speed	n	1385 rpm
Specific ratio		1.01

Data at optimum energy efficiency point

Consult instructions for information regarding installation, disassembly and recycling of this product