

Technical data

Voltage	U	265/460	V
Phase		3	~
Frequency	f	60	Hz
Speed	n	1175	RPM
Power consumption	P _e	1950	W
Nominal current	I _{nom}	6.4/3.7	A
Maximum current	I _{max}	7.8/4.5	A
Cos φ		0.71	
Capacitor		-	μF/V
Ambient temperature	T _{amb min/max}	-4...104	°F
Insulation Class		CL.F	
IP Class		IP55	
Weight		134.3	Lbs.
Packing dimensions		48.0x48.0x23.4	inch

Fan details


Impeller blades	6
Impeller type	8
Impeller system	G
Impeller material	PG

Control options

Triac controller	No
Transformer	No
Frequency drive	Yes

Characteristics

0.00 in. wg	15650 CFM
0.80 in. wg	12400 CFM

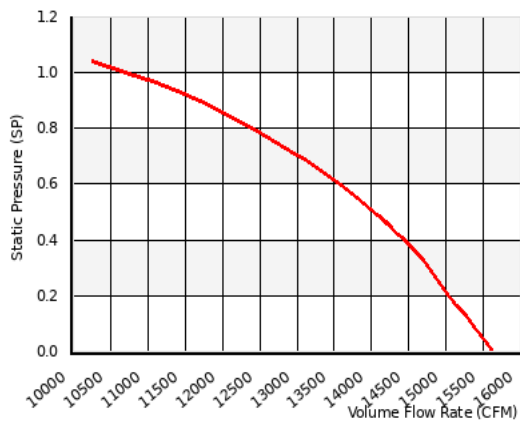

Please note: Picture may deviate from original product

Approval(s)



Wiring diagram

BB07 - 3 Phase - Star Connected Rotor - CCW

