



Technical data

Voltage	U	230	V
Phase		1	~
Frequency	f	50	Hz
Speed	n	1385	RPM
Power consumption	P _e	330	W
Nominal current	I _{nom}	1.5	A
Maximum current	I _{max}	2.2	A
Cos φ		0.98	
Capacitor		11/400	μF/V
Ambient temperature	T _{amb min/max}	-25...40	°C
Insulation Class		CL.F	
IP Class		IP55	
Sound pressure level (2 m)	L _p (meas.)	66	dB(A)
Sound pressure level (7 m)	L _p (calc.)	55	dB(A)
Weight		14.1	kg
Packing dimensions		670x670x315	mm


Fan details

Impeller blades	6
Impeller type	3
Impeller system	C
Impeller material	PP

Control options

Triac controller	Yes
Transformer	Yes
Frequency drive	No

Characteristics

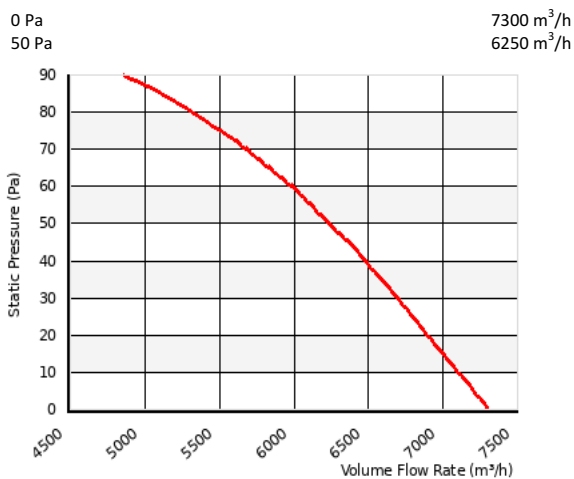

Please note: Picture may deviate from original product

Approval(s)







Wiring diagram

C1 - 1 Phase - Standard - CCW

S0000010695A

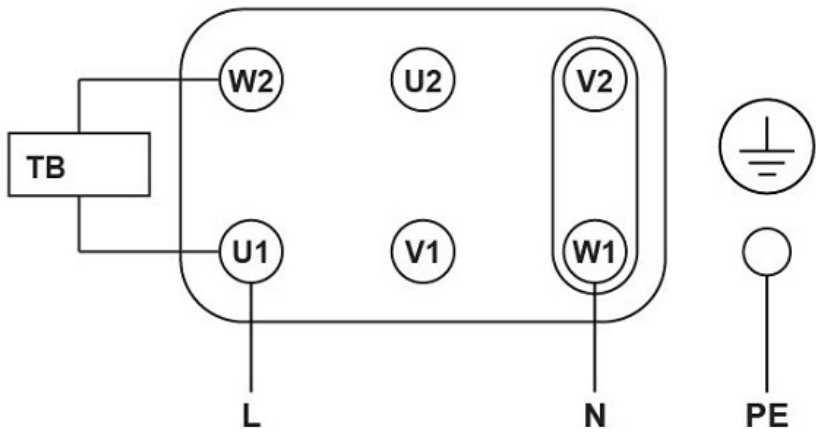

Dimensions

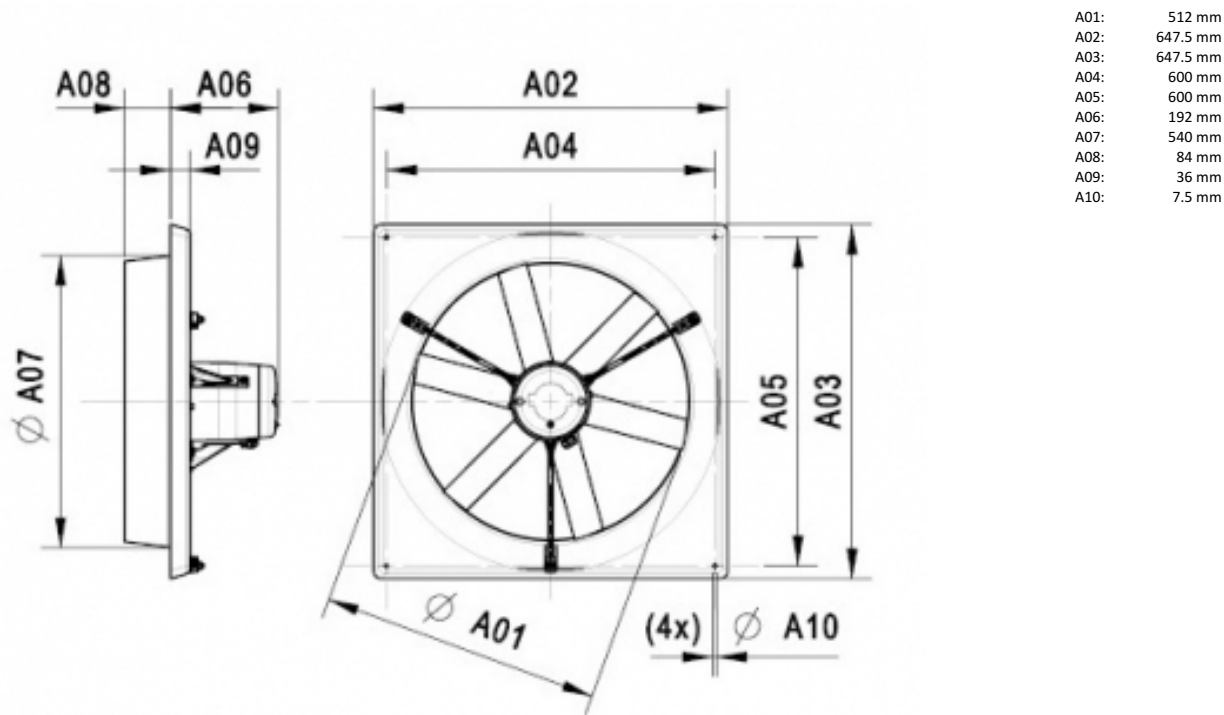

Data according to commission Regulation (EU) 327/2011

Axial fan efficiency	η_f	35.9%
Measurement category		A
Efficiency category		Static
Efficiency grade	N	45
VSD		Not included
Year of manufacturing		
Manufacturer		VOSTERMANS Parlevinkeweg 54 5928 NV Venlo The Netherlands 12021767
Commercial reg. no.		V4E50EAM11100
Model number		
Motor input power	Pe	0.358 kW
Volume flow	Qv	4981 m³/h
Pressure difference	psf	93 Pa
Rotational speed	n	1368 rpm
Specific ratio		1.01

Data at optimum energy efficiency point

Consult instructions for information regarding installation, disassembly and recycling of this product