



Technical data

Voltage	U	230	V
Phase		1	~
Frequency		50	Hz
Speed		1385	RPM
Power consumption	P _e	400	W
Nominal current	I	1.8	A
Maximum current	I	2.9	A
Capacitor		10/400	μF
Ambient temperature	T _{amb min/max}	-13...104	°F
Insulation Class		CL.F	
IP Class Fan		IP55	
Sound pressure level	L _p	70	dB(A)
Sound pressure level distance		6.6	ft
Weight		36.6	Lbs.
Packing dimensions		26.4x26.4x12.4	inch

Fan details

Impeller blades	6
Impeller type	3
Impeller system	C
Impeller material	PP


Control options

Triac controller	Yes
Transformer	Yes
Intelligent Fan Drive	Yes
RFREINV7 control	Yes


* This fan is suitable for 1~ frequency control with the Invertek Optidrive type RFREINV7. This Invertek Optidrive RFREINV7 is equipped with a special Vostermans Ventilation BV parameter set. This Invertek Optidrive RFREINV7 is available from Vostermans Ventilation BV.

Characteristics

0.00 in. wg	4910 CFM
0.20 in. wg	4240 CFM

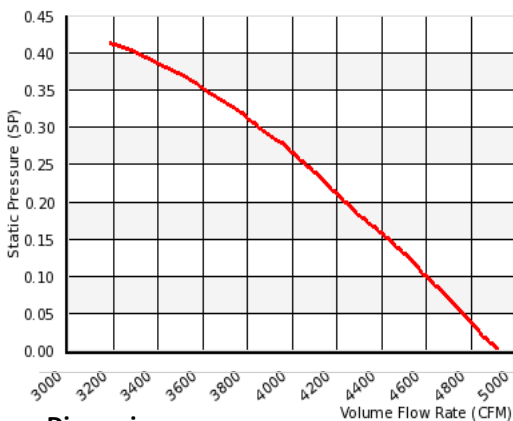

Dimensions

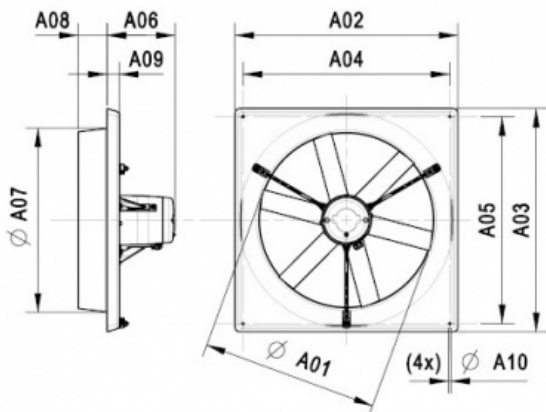

A01:	20.2 inch
A02:	25.5 inch
A03:	25.5 inch
A04:	23.6 inch
A05:	23.6 inch
A06:	7.6 inch
A07:	21.3 inch
A08:	3.3 inch
A09:	1.4 inch
A10:	0.3 inch



Please note: Picture may deviate from original product

Approval(s)



Wiring diagram - Fan

AA01 - 1 Phase - Standard - CCW

