

Technical data

Voltage	U	230/400	V
Phase		3	~
Frequency	f	50	Hz
Speed	n	575	RPM
Power consumption	P _e	1350	W
Nominal current	I _{nom}	4.5/2.6	A
Maximum current	I _{max}	5.5/3.2	A
Cos φ		0.75	
Capacitor		-	μF/V
Ambient temperature	T _{amb min/max}	-25...40	°C
Insulation Class		CL.F	
IP Class		IP55	
Weight		119.5	kg
Packing dimensions		16.7x1000x1000	mm

Fan details



Impeller blades	3
Impeller type	10
Impeller system	N
Impeller material	PG

Control options

Triac controller	No
Transformer	No
Frequency drive	Yes

Characteristics

0 Pa 46900 m³/h
50 Pa 30800 m³/h

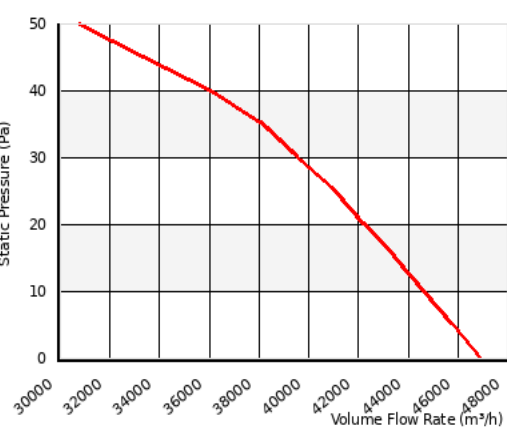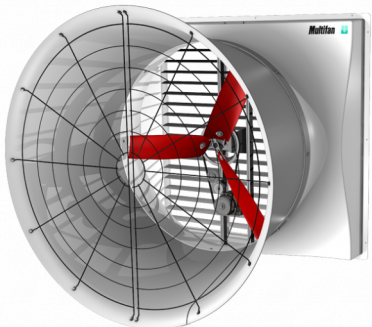


Please note: Picture may deviate from original product

Approval(s)

Wiring diagram
C11 - 3 Phase - Y connection - CW



Dimensions

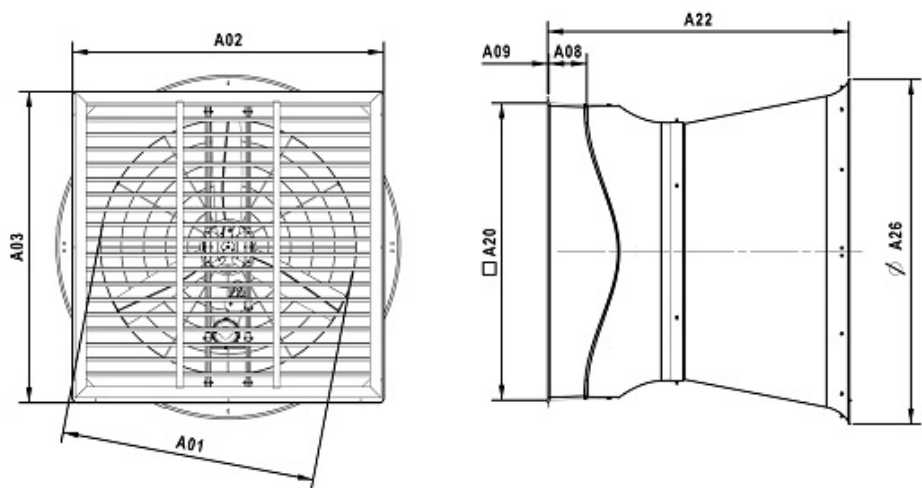

A01:	1278 mm
A02:	1530 mm
A03:	1530 mm
A08:	178 mm
A09:	9 mm
A20:	1441 mm
A22:	1600 mm
A26:	1769 mm