

Technical data

Voltage	U	240/420	V
Phase		3	~
Frequency	f	60	Hz
Speed	n	1000	RPM
Power consumption	P _e	390	W
Nominal current	I _{nom}	1.4/0.8	A
Maximum current	I _{max}	0.0	A
Cos φ		0	
Capacitor		-	μF/V
Ambient temperature	T _{amb min/max}	-13...104	°F
Insulation Class		CL.F	
IP Class		IP55	
Weight		26.7	Lbs.
Packing dimensions		28.3x28.3x15.7	inch

Fan details


Impeller blades	4
Impeller type	5
Impeller system	C
Impeller material	PP

Control options

Triac controller	No
Transformer	Yes
Frequency drive	Yes

Characteristics

0.00 in. wg	4740 CFM
0.20 in. wg	3630 CFM

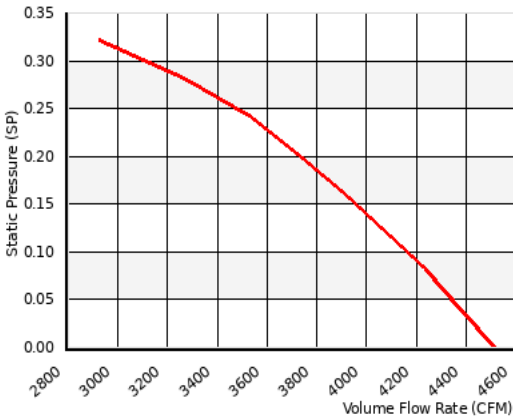

Please note: Picture may deviate from original product

Approval(s)

Motor approval




VOSTERMANS
VENTILATION

Vostermans Ventilation B.V.
Venlo - The Netherlands
+31 (0)77 389 32 32
ventilation@vostermans.com

Vostermans Ventilation Inc.
Bloomington, IL - U.S.A.
+1 309 827 9798
ventilation@vostermansusa.com

Vostermans Ventilation Ltd. Co.
Shanghai - China
+86 21 5290 2889/2899
ventilation@vostermanschina.com

Vostermans Ventilation Sdn. Bhd.
Tmn Klang Jaya - Malaysia
+60 (0)33324 3638
ventilation@vostermansasia.com

Wiring diagram
C11 - 3 Phase - Y connection - CCW



Article number: P6D56K1M11100

Tube mounting fans



VOSTERMANS
VENTILATION

Vostermans Ventilation B.V.
Venlo - The Netherlands
+31 (0)77 389 32 32
ventilation@vostermans.com

Vostermans Ventilation Inc.
Bloomington, IL - U.S.A.
+1 309 827 9798
ventilation@vostermansusa.com

Vostermans Ventilation Ltd. Co.
Shanghai - China
+86 21 5290 2889/2899
ventilation@vostermanschina.com

Vostermans Ventilation Sdn. Bhd.
Tmn Klang Jaya - Malaysia
+60 (0)33324 3638
ventilation@vostermansasia.com