



Technical data

Voltage	U	265/460	V
Phase		3	~
Frequency	f	60	Hz
Speed	n	1735	RPM
Power consumption	P _e	170	W
Nominal current	I _{nom}	0.7/0.4	A
Maximum current	I _{max}	0.9/0.5	A
Cos φ		0.56	
Capacitor		-	μF/V
Ambient temperature	T _{amb min/max}	-25...40	°C
Insulation Class		CL.F	
IP Class		IP55	
Sound pressure level (2 m)	L _p (meas.)	64	dB(A)
Sound pressure level (7 m)	L _p (calc.)	53	dB(A)
Weight		12.8	kg
Packing dimensions		510x510x315	mm


Fan details

Impeller blades	6
Impeller type	3
Impeller system	C
Impeller material	PP

Control options

Triac controller	No
Transformer	Yes
Frequency drive	Yes

Characteristics

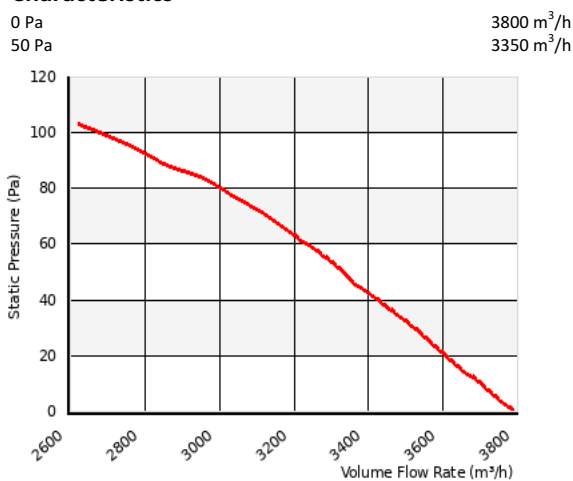

Please note: Picture may deviate from original product

Approval(s)


Motor approval
CE **UL**



Wiring diagram
C11 - 3 Phase - Y connection - CCW



Dimensions

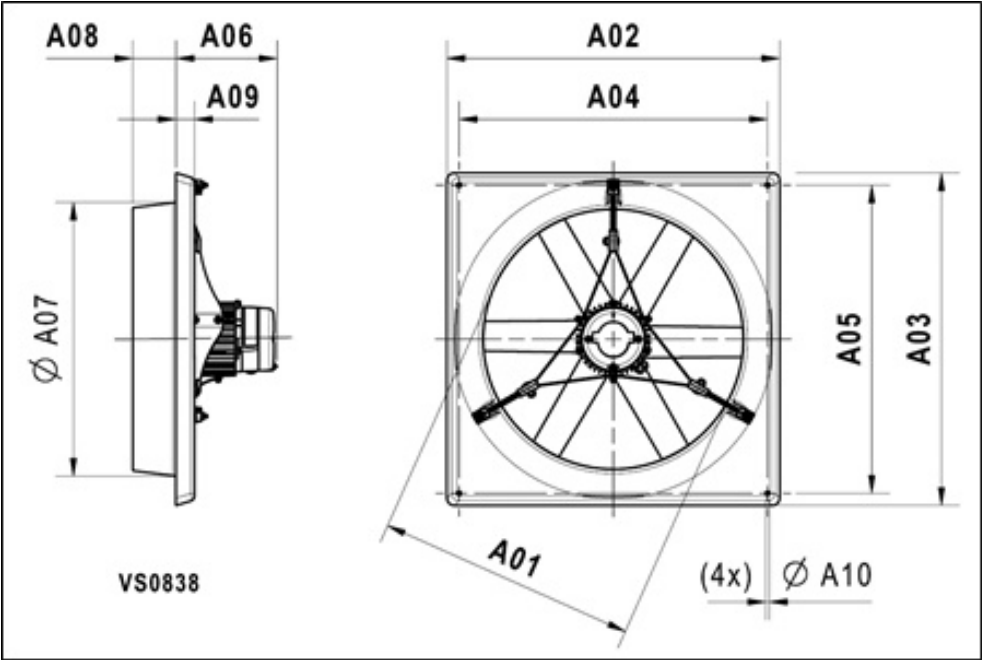

A01:	362 mm
A02:	492.5 mm
A03:	492.5 mm
A04:	445 mm
A05:	445 mm
A06:	192 mm
A07:	390 mm
A08:	84 mm
A09:	36 mm
A10:	7.5 mm

