



Technical data

Voltage	U	265/460	V
Phase		3	~
Frequency	f	60	Hz
Speed	n	1720	RPM
Power consumption	P _e	410	W
Nominal current	I _{nom}	1.5/0.9	A
Maximum current	I _{max}	1.9/1.1	A
Cos φ		0.61	
Capacitor		-	μF/V
Ambient temperature	T _{amb min/max}	-25...40	°C
Insulation Class		CL.F	
IP Class		IP55	
Sound pressure level (2 m)	L _p (meas.)	69	dB(A)
Sound pressure level (7 m)	L _p (calc.)	58	dB(A)
Weight		12.9	kg
Packing dimensions		600x600x400	mm


Fan details

Impeller blades	4
Impeller type	3
Impeller system	C
Impeller material	PP

Control options

Triac controller	No
Transformer	Yes
Frequency drive	No

Characteristics

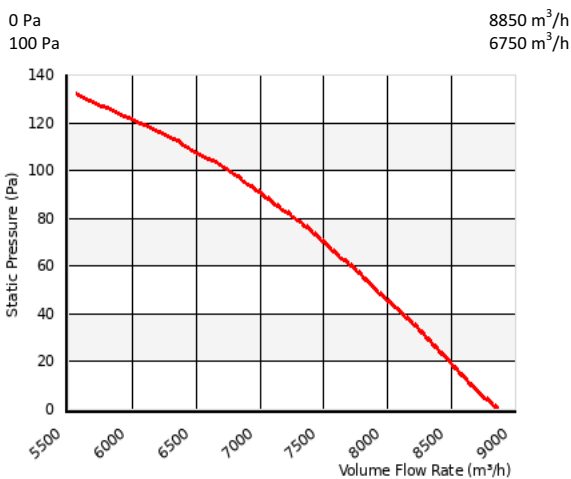

Please note: Picture may deviate from original product


Approval(s)



Wiring diagram
C11 - 3 Phase - Y connection - CCW



Dimensions

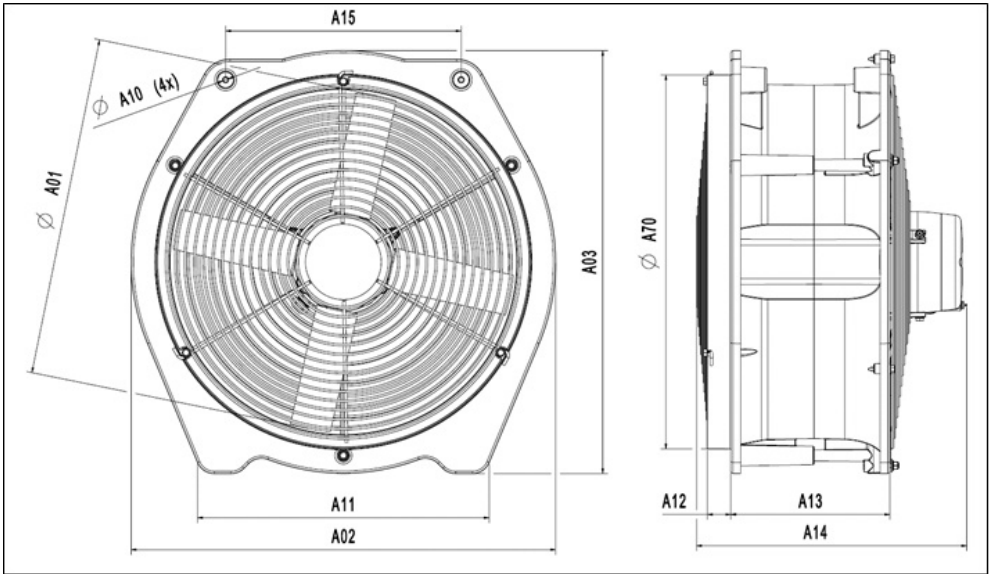

A01:	472 mm
A02:	587 mm
A10:	6.5 mm
A11:	403 mm
A12:	33 mm
A13:	220 mm
A14:	374 mm
A15:	326 mm
A70:	520 mm

