



Technical data

Voltage	U	240	V
Phase	1	~	
Frequency	f	60	Hz
Speed	n	1650	RPM
Power consumption	P _e	1700	W
Nominal current	I _{nom}	7.4	A
Maximum current	I _{max}	8.7	A
Cos φ		0.94	
Capacitor		22/400	μF/V
Ambient temperature	T _{amb min/max}	-13...104	°F
Insulation Class		CL.F	
IP Class		IP55	
Sound pressure level (6.6 ft)	L _p (meas.)	81	db(A)
Sound pressure level (23 ft)	L _p (calc.)	70	db(A)
Weight		49.8	Lbs.

Fan details


Impeller blades	4
Impeller type	5
Impeller system	G
Impeller material	PG

Control options

Triac controller	No
Transformer	No
Frequency drive	No

Characteristics

0.00 in. wg 10350 CFM
0.60 in. wg 8120 CFM

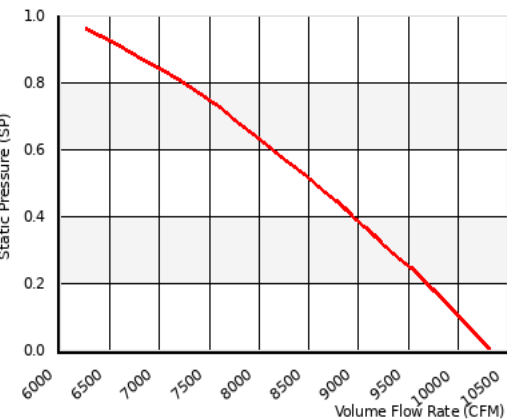

Please note: Picture may deviate from original product

Approval(s)



Wiring diagram
C1 - 1 Phase - Standard - CCW

